

COKYASAR

50th
YEAR

PRODUCT
CATALOG

**infinite
possibilities**



cokysarholding.com.tr

THE LEADING STEEL WIRE MANUFACTURER IN TÜRKİYE

4 Wire Production Facilities with Modern,
State-Of-The-Art Technology,
Annual Production Capacity of 280.000 Tons

COKYASAR

Our companies that operate in the sector of steel wire and aluminum have been united at a single source under the roof of Çokyaşar Holding as part of a Corporate Transformation Project.

The companies of Çokyaşar Holding that has 4 production facilities, 3 of which are in Türkiye and 1 in Albania, have a total annual production of 280,000 tons.

At the same time, the holding serves Türkiye in the best way possible by employing 1,000 people and creating employment opportunities for 1,000 people.

**infinite
possibilities**

ÇOKYAŞAR

ÇOKYAŞAR HOLDING, formed by our group of companies operating in steel wire, steel rope and industrial products sectors, realize an annual production of over 280.000 tons with a turnover of approximately 270M USD.

Founded by our honorary president Ahmet Çokyaşar in 1973, ÇOKYAŞAR HOLDING is an industrial company that currently serves many sectors, such as energy, infrastructure, cable, automotive, construction, agriculture and perimeter security systems. Our value added product range includes wires and wire products, particularly hot dip galvanized wires. Our headquarters is located in Istanbul; and production facilities are in Istanbul, Adana, Duzce and Elbasan/Albania.

As the leading company in its own sector, ÇOKYAŞAR HOLDING has more than 280 thousand tons of annual production capacity with approximately, 1000 employees and 4 giant production facilities. We are proud to be in the first 500 exporters and industrial enterprises of Türkiye. ÇOKYAŞAR HOLDING is exporting to 80 countries across the world, especially to Europe, Middle East, South and North America.

With more than 50 years of experience and expertise in trade and manufacturing of industrial products, ÇOKYAŞAR HOLDING takes pride in adding value to its customers as well as to Turkish economy, and carrying out responsible business conduct.


ÇOKYAŞAR HOLDING has proven its devotion to its customers, quality standards, employees and environment through, 18001, ISO 9001, ISO 14001, ISO 27001, TSE EN 10244-2, TSE EN 10223-6, and TSE EN 10223-7 certifications.

INDEX

7 ENERGY

26 PERIMETER PROTECTION AND SECURITY SYSTEMS


38 CERTIFICATES

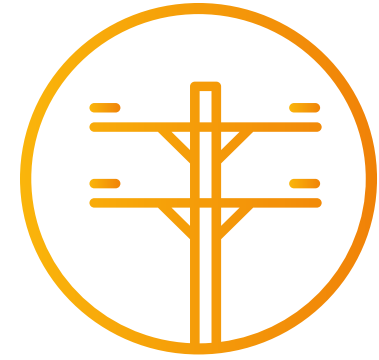

ENERGY




Standard Galvanized Wire



Technical Specifications

Material	Low-carbon steel wire
Coating	Hot-dip galvanized (Zn)
Wire Diameter	0,70 - 10,00 mm
Coating Thickness	40-400 g/m ²
Tensile Strength	350-500 N/mm ² , 500-700 N/mm ² , 700-900 N/mm ² , 800-1.000 N/mm ²
Coil Weight	100-1200 kg
Packaging	Rosette coil
Areas of Use	Production of wire netting, barbed wires, security panels, PVC coated wires, wire meshes, cages, bucket handles and nails


Armouring Wire



Technical Specifications

Material	Low-carbon steel wire
Coating	Hot-dip galvanized (Zn)
Wire Diameter	0,80 - 8,00 mm
Coating Thickness	40-400 g/m ²
Tensile Strength	340-500 MPa
Coil Weight	100-1200 kg
Packaging	Rosette coil, metal-profile basket, iron/wooden coil (D=630 mm and D=800 mm), Z2- Z3 coil
Areas of Use	Power cable, Subsea cables, Umbilicals
Standards	BS 5467/EN10257-2/10244-2


Patented Galvanized Wire



Technical Specifications


Material	High-carbon steel wire
Coating	Hot-dip galvanized (Zn)
Wire Diameter	1,40 - 6,50 mm
Coating Thickness	180-350 g/m ²
Tensile Strength	850-2050 N/mm ²
Coil Weight	750-1250 kg
Packaging	Rosette coil, Z2 coil
Areas of Use	Production of steel ropes and cord wires

Phosphated Wire



Technical Specifications


Material	High-carbon steel wire
Coating	Phosphate
Wire Diameter	1,40-4,50 mm // 0,90-2,50 mm
Coating Thickness	5-7,5 g/m ²
Tensile Strength	700-1300 n/mm ²
Coil Weight	500-1100 kg
Packaging	Rosette coil, Z2 coil
Areas of Use	Steel wire rope



Technical Specifications



Material	High-carbon steel wire
Coating	Hot-dip galvanized (Zn)
Wire Diameter	1,24-5,50 mm
Coating Thickness	180-320 g/m ²
Tensile Strength	1100-1800 n/mm ²
Coil Weight	375-1100 kg
Packaging	Rosette coil, Z2-Z3 coil, wooden spool (D=630 mm and D=800 mm)
Areas of Use	Overhead line conductors
Standards	EN 50189-ASTM B498




Technical Specifications



Material	High/low-carbon steel wire
Coating	N/A
Wire Diameter	0,75 mm-10,00 mm
Coating Thickness	N/A
Tensile Strength	500-1900 N/mm ²
Coil Weight	750-2000 kg
Packaging	Rosette coils, small coils, Z2-Z3 spool, wooden spool
Areas of Use	Production of nails, staples and meshes


PVC Coated Wire



Technical Specifications


Material	Low-carbon PVC coated wire
Coating	Hot-dip galvanized
Wire Diameter	2,70-4,75 mm
Coating Thickness	40-350 g/m ²
Tensile Strength	350-520 N/mm ²
Coil Weight	100-700 kg
Packaging	Rosette coil
Areas of Use	Production of fences

Black Annealed Wire




Technical Specifications

Material	Annealed wire
Coating	N/A
Wire Diameter	0,90 mm-8,00 mm
Coating Thickness	N/A
Tensile Strength	Max. 450 N/mm
Coil Weight	10-2000 kg
Packaging	Rosette coils, bundles
Areas of Use	The construction industry



Technical Specifications

Material	Oiled bailing wire
Coating	N/A
Wire Diameter	Between 1,70 and 4,00 mm
Tensile Strength	Max. 450 N/mm
Coil Weight	Max. 48 kg
Packaging	In small coils
Areas of Use	The agriculture, recycling and packaging/cardboard industries




Technical Specifications

Diameter Tolerance	Ovality		TS (N/mm ²)	BL (N)	Twist / Tortion (cycle)	Packaging Properties	Carbon(%)
	Min.-Max.	Max.	Min.-Target-Max.	Min.-Max.	Min.		0.45%
1.30 (C45)	+/- 0,02	15	1620 - 1715 - 1810	2149 - 2401	33	KGB - 600 - 800 KG	0.45%
1.40 (C45)	+/- 0,02	15	1620 - 1715 - 1810	2492 - 2785	33	KGB	0.65%
1.50 (C65)	+/- 0,02	15	1800 - 1900 - 2000	3180 - 3530	32	KGB	0.65%
1.60 (C70)	+/- 0,02	15	1800 - 1900 - 2000	3620 - 4020	32	KGB	0.65%
1.70 (C65)	+/- 0,02	15	1800 - 1900 - 2000	4090 - 4540	32	KGB	0.65%
1.80 (C65)	+/- 0,02	15	1800 - 1900 - 2000	4580 - 5090	32	KGB	0.65%
1.90 (C65)	+/- 0,02	15	1750 - 1850 - 1950	4950 - 5530	32	KGB	0.65%
2.00 (C65)	+/- 0,02	15	1700 - 1775 - 1850	5338 - 5809	29	KGB	0.65%
2.20 (C65)	+/- 0,02	15	1620-1700 - 1750	6155 - 6649	28	KGB	0.65%
2.32 (C65)	+/- 0,02	15	1430 - 1515 - 1600	6042 - 6760	28	KGB	0.65%
2.38 (C65)	+/- 0,02	15	1550 - 1625 - 1700	6892 - 7559	28	KGB	0.65%
2.50 (C65)	+/- 0,02	15	1500 - 1600 - 1700	7300 - 8350	---	KGB	0.65%
3.50 (C70)	+/- 0,02	15	1370 - 1500 - 1600	13175 - 15386	---	COIL - 250 KG	0.70%
4.00 (C70)	+/- 0,02	15	1280 - 1380 -1480	16077 - 18766	---	COIL	0.70%


Standard: EN10270



- K = 255
- L = 117
- M = 167
- N = 153
- O = 16 & 33
- Q = 43
- P = 3X13

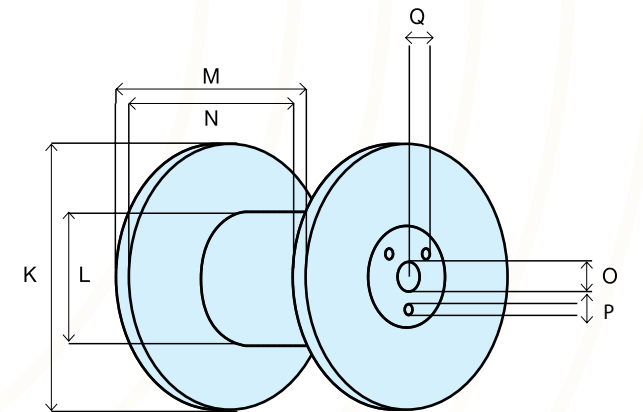

infinite possibilities

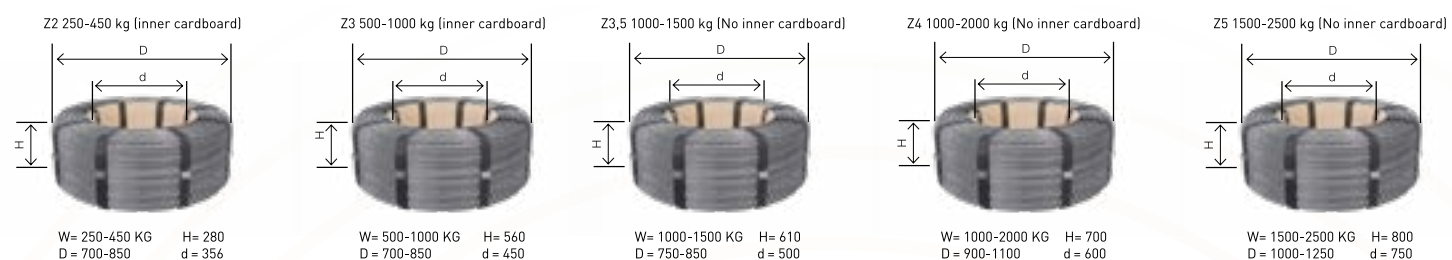


Production Technique	Steel wires which are cold-rolled with the dry or wet drawing techniques can be manufactures at any standard, galvanized, phosphated or patented.		
Use	The product is used by manufacturers of industrial springs, control cables and bed springs.		
Class	Low Tensile Strength	Medium Tensile Strength	High Tensile Strength
Range of Wire Diameters	0,40 mm - 14,00 mm	0,40 mm - 14,00 mm	0,40 mm - 12,00 mm
Tensile Strength	EN 10270-1		
Packaging	Coil, Z2 and Z3 with cardboard cores	250 - 450 kg Z2	

*Depending on customer requests, wires can be manufactured in galvanized form or at any desired tensile strenght range.

Production Technique	In the production, which is carried out through the cold drawing method, chemicals that are highly resistant to moisture and corrosion are used.		
Use	The product is used by bed and seating group manufacturers.		
Class	Low Tensile Strength	Medium Tensile Strength	High Tensile Strength
	SL	SM	SH
Range of Wire Diameters	0,40 mm - 14,00 mm	0,40 mm - 14,00 mm	0,40 mm - 13,00 mm
Tensile Strength	1060 - 1970 N/mm ²	1130 - 2550 N/mm ²	1540 - 2830 N/mm ²
Packaging	Metal Spools, Z4 and Z5 Cardboard		

*Depending on customer requests, wires can be manufactured in galvanized form or at a different tensile strength range.

Dia (mm)	Quality (10270 - 1)		Type	Packing Type and Weights					
0.40	SL	SM		BS60					
0.50	SL	SM	Phosphated	BS60					
0.60	SL	SM	Phosphated	BS60					
0.70	SL	SM	SH	Phosphated	40 - 50 coil	250 - 350 kg Z2			
0.80	SL	SM	SH	Phosphated	40 - 50 coil	250 - 350 kg Z2			
0.90	SL	SM	SH	Phosphated	40 - 50 coil	250 - 450 kg Z2			
1.00	SL	SM	SH	Phosphated	40 - 50 coil	250 - 450 kg Z2			
1.10	SL	SM	SH	Phosphated	40 - 50 coil	250 - 450 kg Z2			
1.20	SL	SM	SH	Phosphated	40 - 50 coil	250 - 450 kg Z2			
1.30	SL	SM	SH	Phosphated	40 - 50 coil	250 - 450 kg Z2			
1.40	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2			
1.50	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2			
1.60	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2			
1.70	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
1.80	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
1.90	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
2.00	SL	SM	SH	Phosphated	60 - 100 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
2.20	SL	SM	SH	Phosphated	100 - 150 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
2.50	SL	SM	SH	Phosphated	100 - 150 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
2.80	SL	SM	SH	Phosphated	100 - 150 coil	250 - 450 kg Z2	500 - 1000 kg Z3		
3.00	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5		
3.20	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5		
3.50	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5		
4.00	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
4.50	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
5.00	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
5.50	SL	SM	SH	Phosphated	150 - 250 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
6.00	SL	SM	SH	Phosphated	250 - 450 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
6.50	SL	SM	SH	Phosphated	250 - 450 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
7.00	SL	SM	SH	Phosphated	250 - 450 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
7.50	SL	SM	SH	Phosphated	250 - 450 coil	500 - 1000 kg Z3	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
8.00	SL	SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
8.50	SL	SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
9.00	SL	SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
9.50	SL	SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
10.00	SL	SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
10.50		SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
11.00		SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
11.50		SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
12.00		SM	SH	Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
12.50		SM		Phosphated	250 - 450 coil		1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5
13.00		SM		Phosphated	250 - 450 coil	250 - 450 kg coil	1000 - 1500 kg Z3,5	1000 - 2000 kg Z4	1500 - 2500 kg Z5





Technical Specifications

DIA (mm)	COATING		1570 N/mm ²		1770 N/mm ²		1960 N/mm ²	
0.20	Phosphated	Galvanized						
0.25	Phosphated	Galvanized					1960	Patented
0.30	Phosphated	Galvanized				1770	Patented	1960
0.35	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.40	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.45	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.50	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.55	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.60	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.65	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.70	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.75	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.80	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
0.90	Phosphated	Galvanized	1570	Patented	1770	Patented	1960	Patented
1.00	Phosphated	Galvanized	1570	Patented	1770	Patented - W/R	1960	Patented - W/R
1.10	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.20	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.30	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.40	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.50	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.60	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.70	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R
1.80	Phosphated	Galvanized	1570	Patented - W/R	1770	Patented - W/R	1960	Patented - W/R


BS60-METAL CABLE DRUM


2160 N/mm ²		PACKING		
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented	BS60 Reel	250 - 450 kg Z2	
2160	Patented		250 - 450 kg Z2	
2160	Patented		250 - 450 kg Z2	
2160	Patented - W/R		250 - 450 kg Z2	
2160	Patented - W/R		250 - 450 kg Z2	
2160	Patented - W/R		250 - 450 kg Z2	
2160	Patented - W/R			500 - 1000 kg Z3
2160	Patented - W/R			500 - 1000 kg Z3
2160	Patented - W/R			500 - 1000 kg Z3

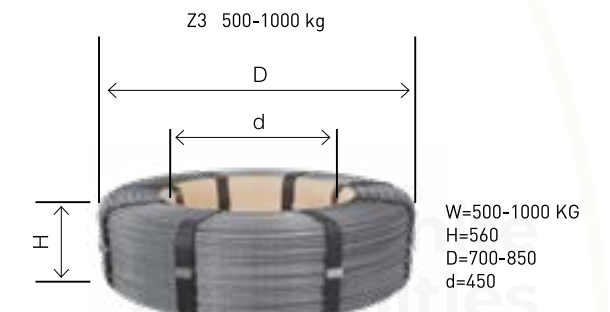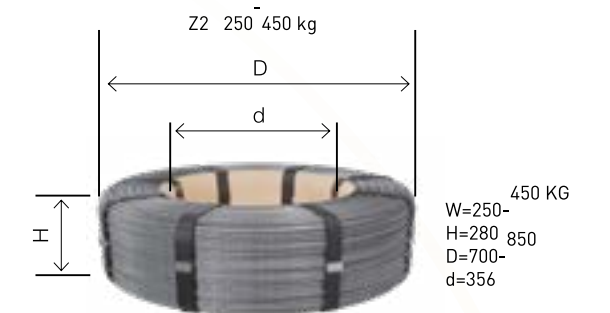


Metalic Spool 25 kg

- K = 255
- L = 117
- M = 167
- N = 153
- O = 16 & 33
- Q = 43
- P = 3X13



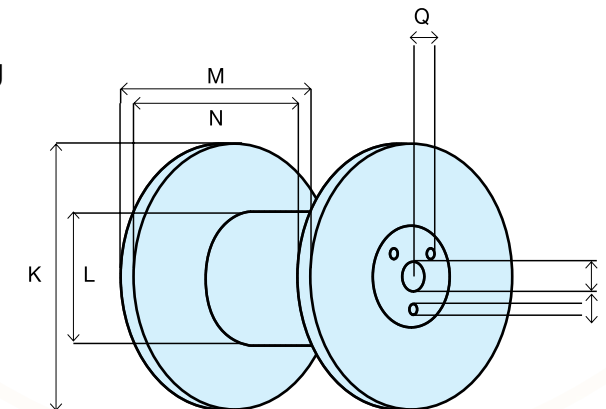




MONOTRON STEEL ROPES

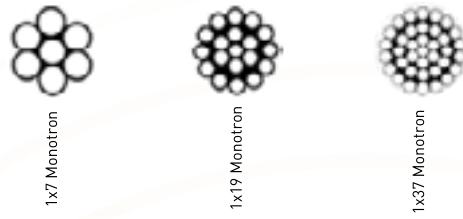

PVC-COATED STEEL ROPES

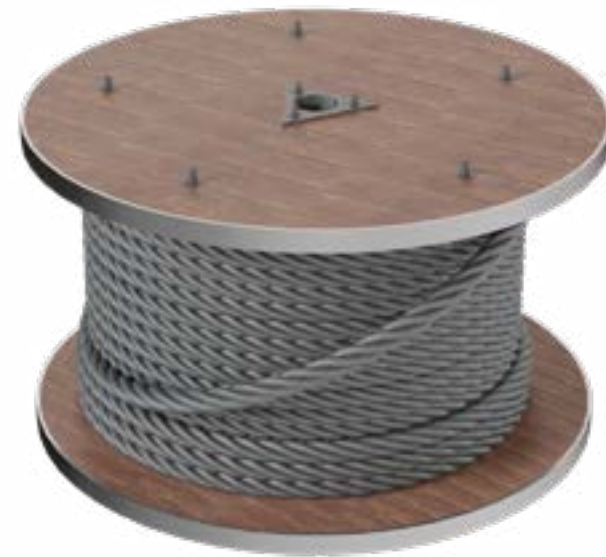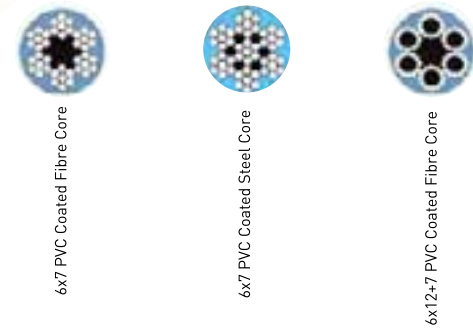

Fishing Ropes (EN12385)

8.00	mm	6x7 Galvanized
10.00	mm	6x7 Galvanized
12.00	mm	6x7 Galvanized
14.00	mm	6x7 Galvanized
16.00	mm	6x7 Galvanized
14.00	mm	6x19 Seale Galvanized
16.00	mm	6x19 Seale Galvanized
18.00	mm	6x19 Seale Galvanized
20.00	mm	6x19 Seale Galvanized
22.00	mm	6x19 Seale Galvanized

Crane Ropes (EN12385)

10.00	mm	6x36 WS
12.00	mm	6x36 WS
14.00	mm	6x36 WS
16.00	mm	6x36 WS
18.00	mm	6x36 WS
18.00	mm	6x36 WS
20.00	mm	6x36 WS
22.00	mm	6x36 WS
24.00	mm	6x36 WS
26.00	mm	6x36 WS
28.00	mm	6x36 WS

Automotive Ropes

(Standard According to Customer Requirement)

1x7	Composition	1,50 mm - 10,00 mm
1x19	Composition	1,50 mm - 20,00 mm
1x25	Composition	3,00 mm - 5,00 mm
1x37	Composition	3,00 mm - 6,00 mm
1x19	Composition	6,00 mm - 20,00 mm

General Application Ropes (EN12385)

6.00	mm	6x19 Standard
8.00	mm	6x19 Standard
10.00	mm	6x19 Standard
12.00	mm	6x19 Standard
14.00	mm	6x19 Standard
16.00	mm	6x19 Standard
18.00	mm	6x19 Standard
20.00	mm	6x19 Standard
22.00	mm	6x19 Standard
24.00	mm	6x19 Standard

Elevator Ropes (EN12385)


8.00	mm	8x19 Seale
10.00	mm	8x19 Seale
11.00	mm	8x19 Seale
12.00	mm	8x19 Seale
6.00	mm	8x19 Seale
6.00	mm	8x19 Seale

Tower Crane Ropes (EN12385)

6.00	mm	19x7 Non-Rotating
8.00	mm	19x7 Non-Rotating
10.00	mm	19x7 Non-Rotating
12.00	mm	19x7 Non-Rotating
14.00	mm	19x7 Non-Rotating
16.00	mm	19x7 Non-Rotating
18.00	mm	19x7 Non-Rotating


Highway Ropes (EN12385)

19.00	mm	1x19
19.00	mm	3x7

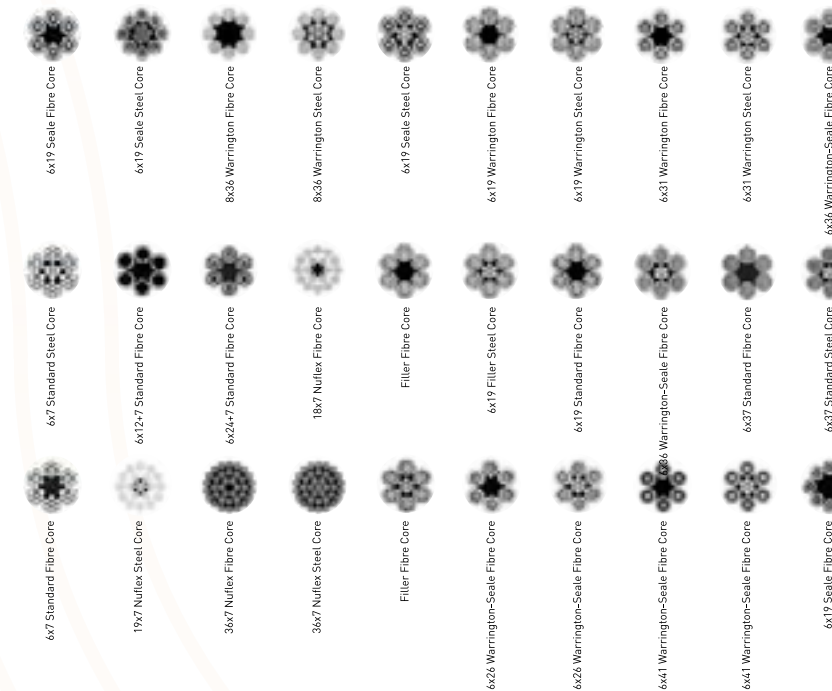


Notes: We can also produce steel wire ropes according to our valuable customer's requirements. We've started to produce Glozy products (95% Zinc, 5% Aluminium) and trial orders have been also started.

***Please contact us if you have any requests for fibre or steel core cables with different constructions.**




Technical Specifications

Material	High-carbon steel wire
Coating	Hot-dip galvanized (Zn)
Wire Diameter	1,24-5,50 mm
Coating Thickness	Between 100 gr/m ² and 350 gr/m ²
Tensile Strength	1240-1770 N/mm ²
Coil Weight	400-1200 kg
Packaging	Multiples of 1000 meters packed around 500-mm and 1300-mm spool
Areas of Use	Overhead line conductors, the agriculture industry
Standards	EN 50189-ASTM B498
Construction	1x7-1x19 (1+6+12)




Technical Specifications

Diameter (mm)	6.5
	8
	10
	12
	14
	16
	18
Construction	8X19 Warrington (8x(1+6+6+6))
	8X19 Seale (8x(1+9+9))
	8X19 Seale (8x(1+9+9)) Dual Tensile
Strength (N/mm ²)	1370
	1770

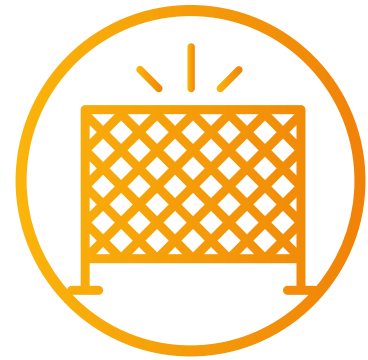

PERIMETER PROTECTION AND SECURITY SYSTEMS







Technical Specifications

Areas of Use	These fence components are used to create private gardens, walled-in spaces and special indoor and outdoor areas with decorative purposes.
Primary Color	RAL 6005 GREEN, RAL 7016 ANTHRACITE
Color Alternatives	The primary color fo all PANADORF 3D series components, which are manufactured pre-painted, is RAL 6005 GREEN and the components can be produced in different colors in case of sufficient demand.
Production Properties	These can be supplied in unpainted, galvanized or black forms.



Line wire 5 x 15

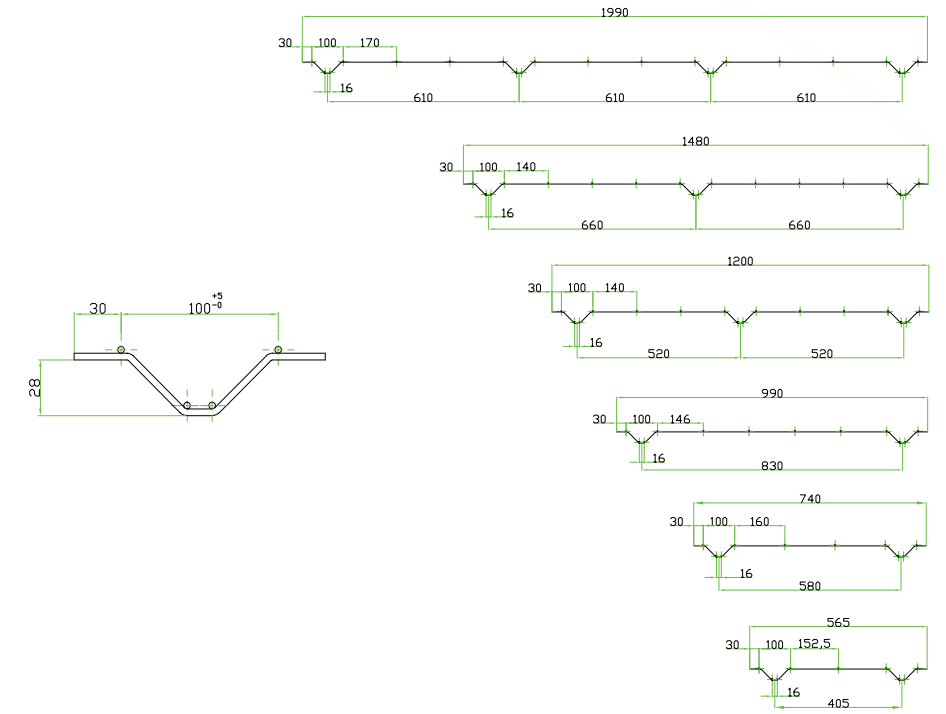

Line wire 5 x 20

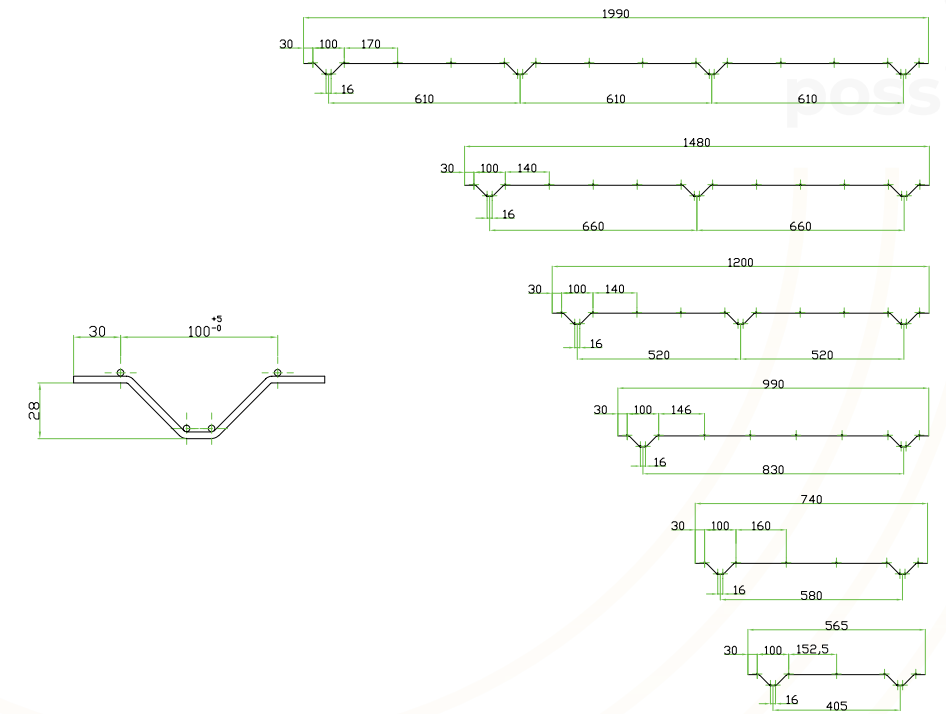

infinite possibilities

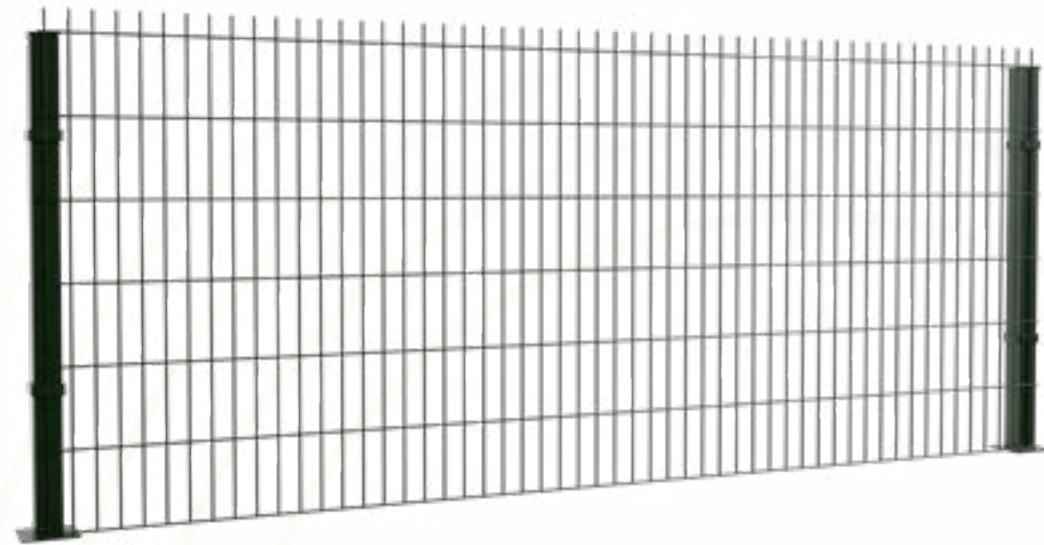

Technical Specifications

Areas of Use

These components are used for defining the boundaries and securing the perimeter around areas with high security requirements, spaces used for infrastructure and transport services and public areas, as well as industrial and agricultural areas. They are also used to prevent or impede the entry of people and animals to such areas. While offering these benefits, they also ensure for the said places and areas to have an image that is conformity with their surroundings.

Primary Color

RAL 6005 GREEN, RAL 7016 ANTHRACITE


Color Alternatives

The primary color for all PANADORF DOUBLE series components, which are manufactured pre-painted, is RAL 6005 GREEN and the components can be produced in different colors in case of sufficient demand.


Production Properties

These can also be provided without paint, in galvanized form.


Line wire 50-200 6x5x6

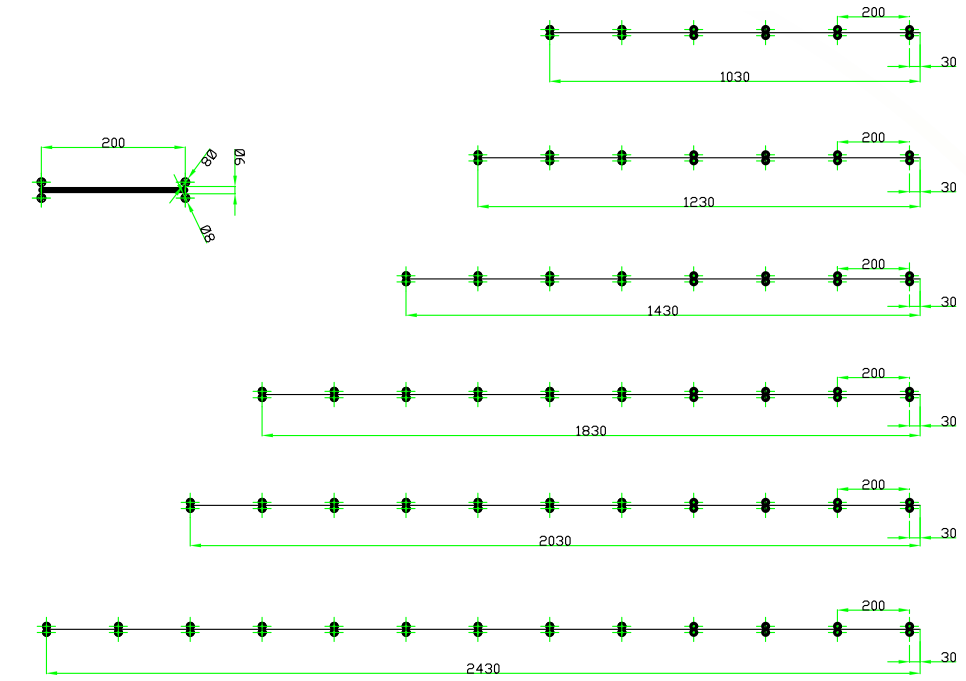

Line wire 50-200 8x6x8

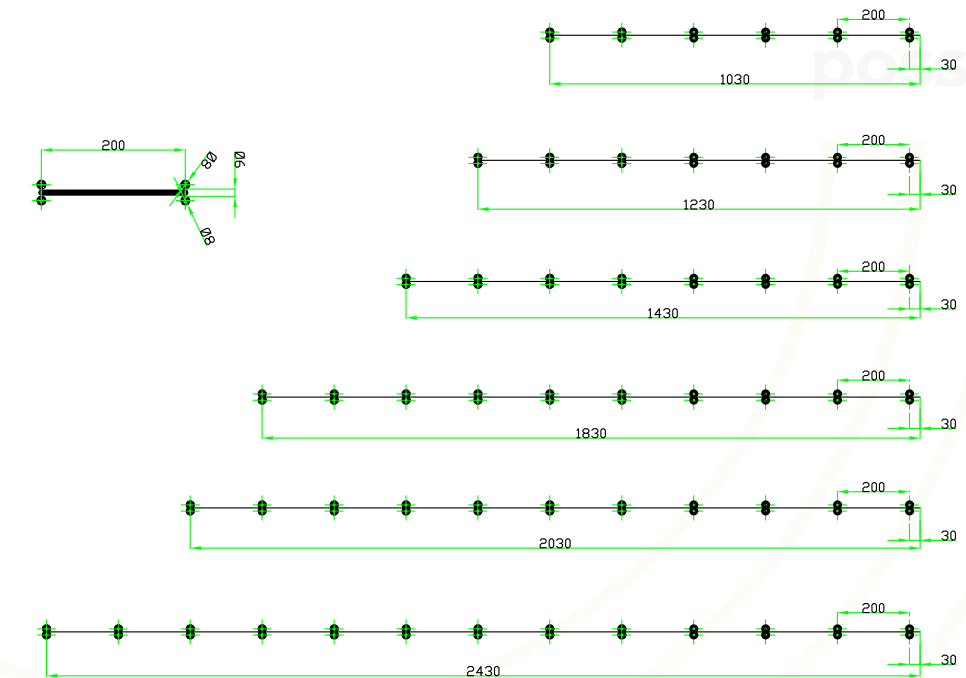

infinite possibilities





Technical Specifications


Areas of Use	These components are used for defining the boundaries and securing the perimeter around areas with high security requirements, spaces used for infrastructure and transport services and public areas, as well as industrial and agricultural areas. They are also used to prevent or impede the entry of people and animals to such areas. While offering these benefits, they also ensure for the said places and areas to have an image that is conformity with their surroundings.
Primary Color	The primary color for all PANADORF SECURE series components, which are manufactured pre-painted, is RAL 6005 GREEN and the components can be produced in different colors in case of sufficient demand.
Color Alternatives	These can also be provided without paint, in galvanized form.

Production Properties

MESH SIZE		CROSS WIRE / LINE WIRE		COMPONENT MEASUREMENTS	
HORIZONTAL	VERTICAL	DIAMETER in mm		HEIGHT	LENGTH
76,2	12,7	4,00	4,00	2.000	2.000
		4,00	4,00	2.500	2.500

Notes: The measurements in the table are **STANDARD INVENTORY** measurements and it is possible for components to be produced at the measurements required by customers upon request. The delivery dates for the custom-manufactured components depend on the production schedule at the time of the order.

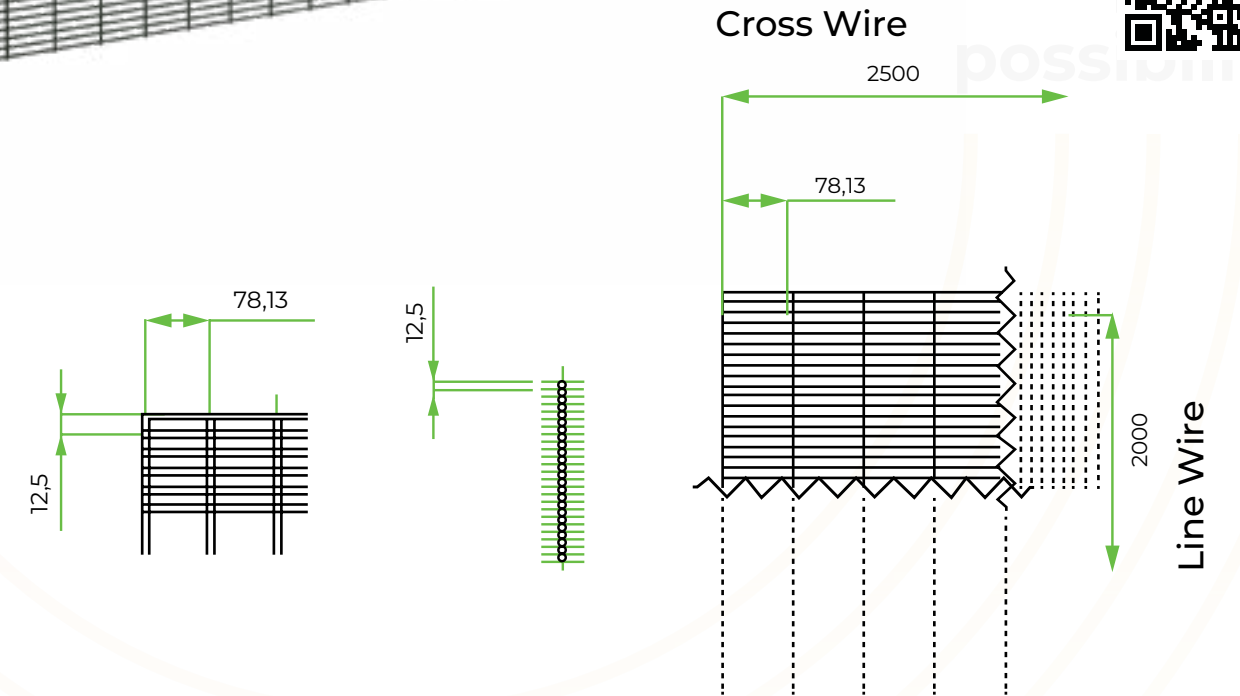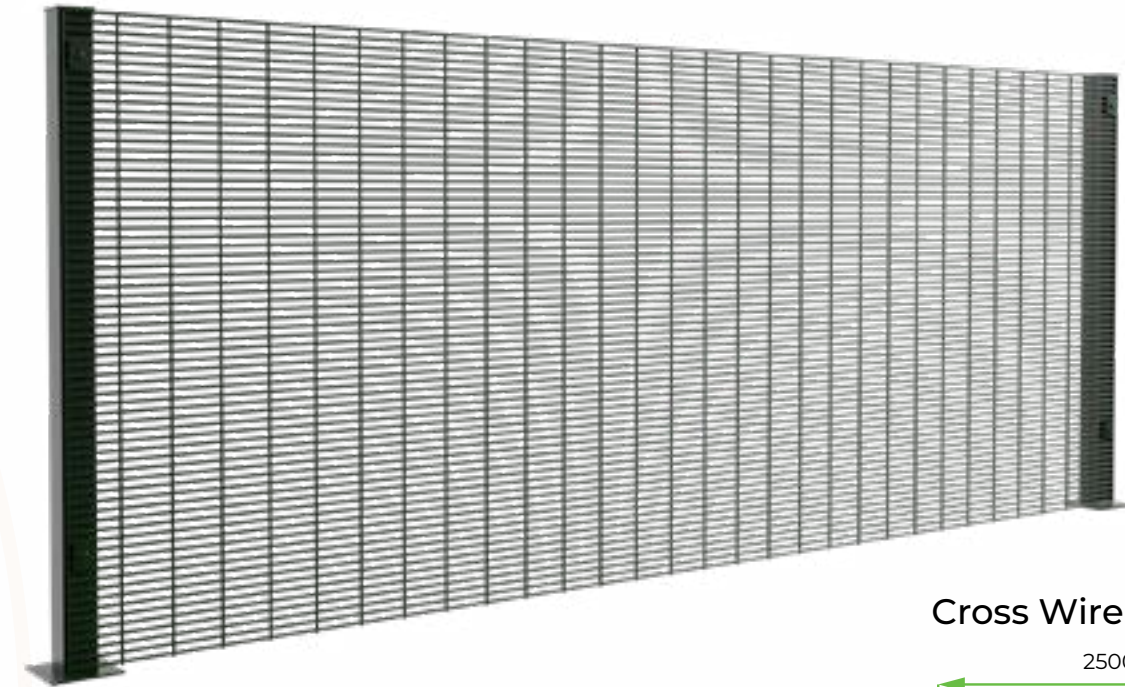



Technical Specifications

Areas of Use

The product is used for establishing the boundaries and securing the perimeter of residences, gardens, public areas, industrial facilities and agricultural spaces. It is also used as fencing for creating and protecting personal, private and public areas and forming gardens, walled-in areas, indoor or outdoor sections for decorative purposes.

Primary Color

RAL 6005 GREEN, RAL 7016 ANTHRACITE


Color Alternatives

The primary color for all PANADORF EURO series components, which are manufactured pre-painted, is RAL 6005 GREEN and the components can be produced in different colors in case of sufficient demand. These can also be provided without paint, in galvanized form.


Production Properties

Mesh Size	50 x 200 mm / 55 x 200 mm
Wire Diameter	4,00 mm 5,00 mm
Height	830 mm - 2.930
Horizontal Length	2000 mm - 2500 mm
Color	All RAL 6005 range of colors or galvanized only

Line wire

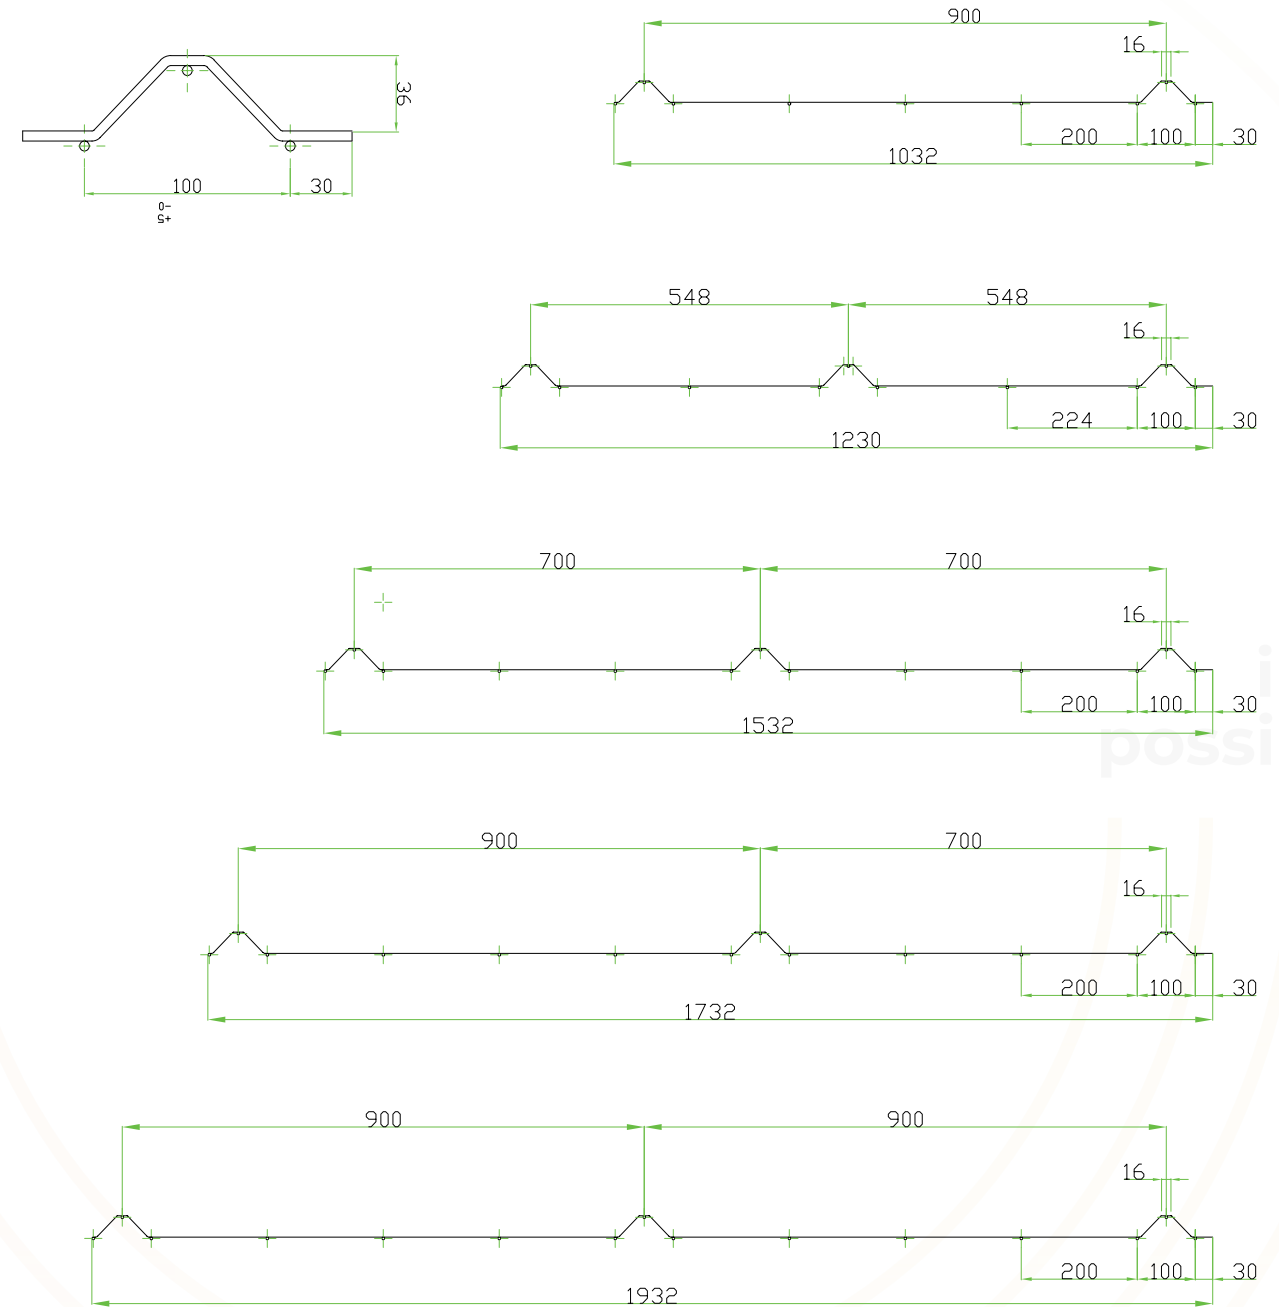


infinite possibilities



FOR A SUSTAINABLE FUTURE

We prevent the release of 1,499,337 kg/year of CO2 into the atmosphere by contributing to the production of a total of 3,406,435 kWh/year of electricity with our solar energy panels in our Çokyasar Wire and Çokyasar Halat factories. In return, we support our environment as much as the benefit of 67,398 trees in reducing carbon emissions.

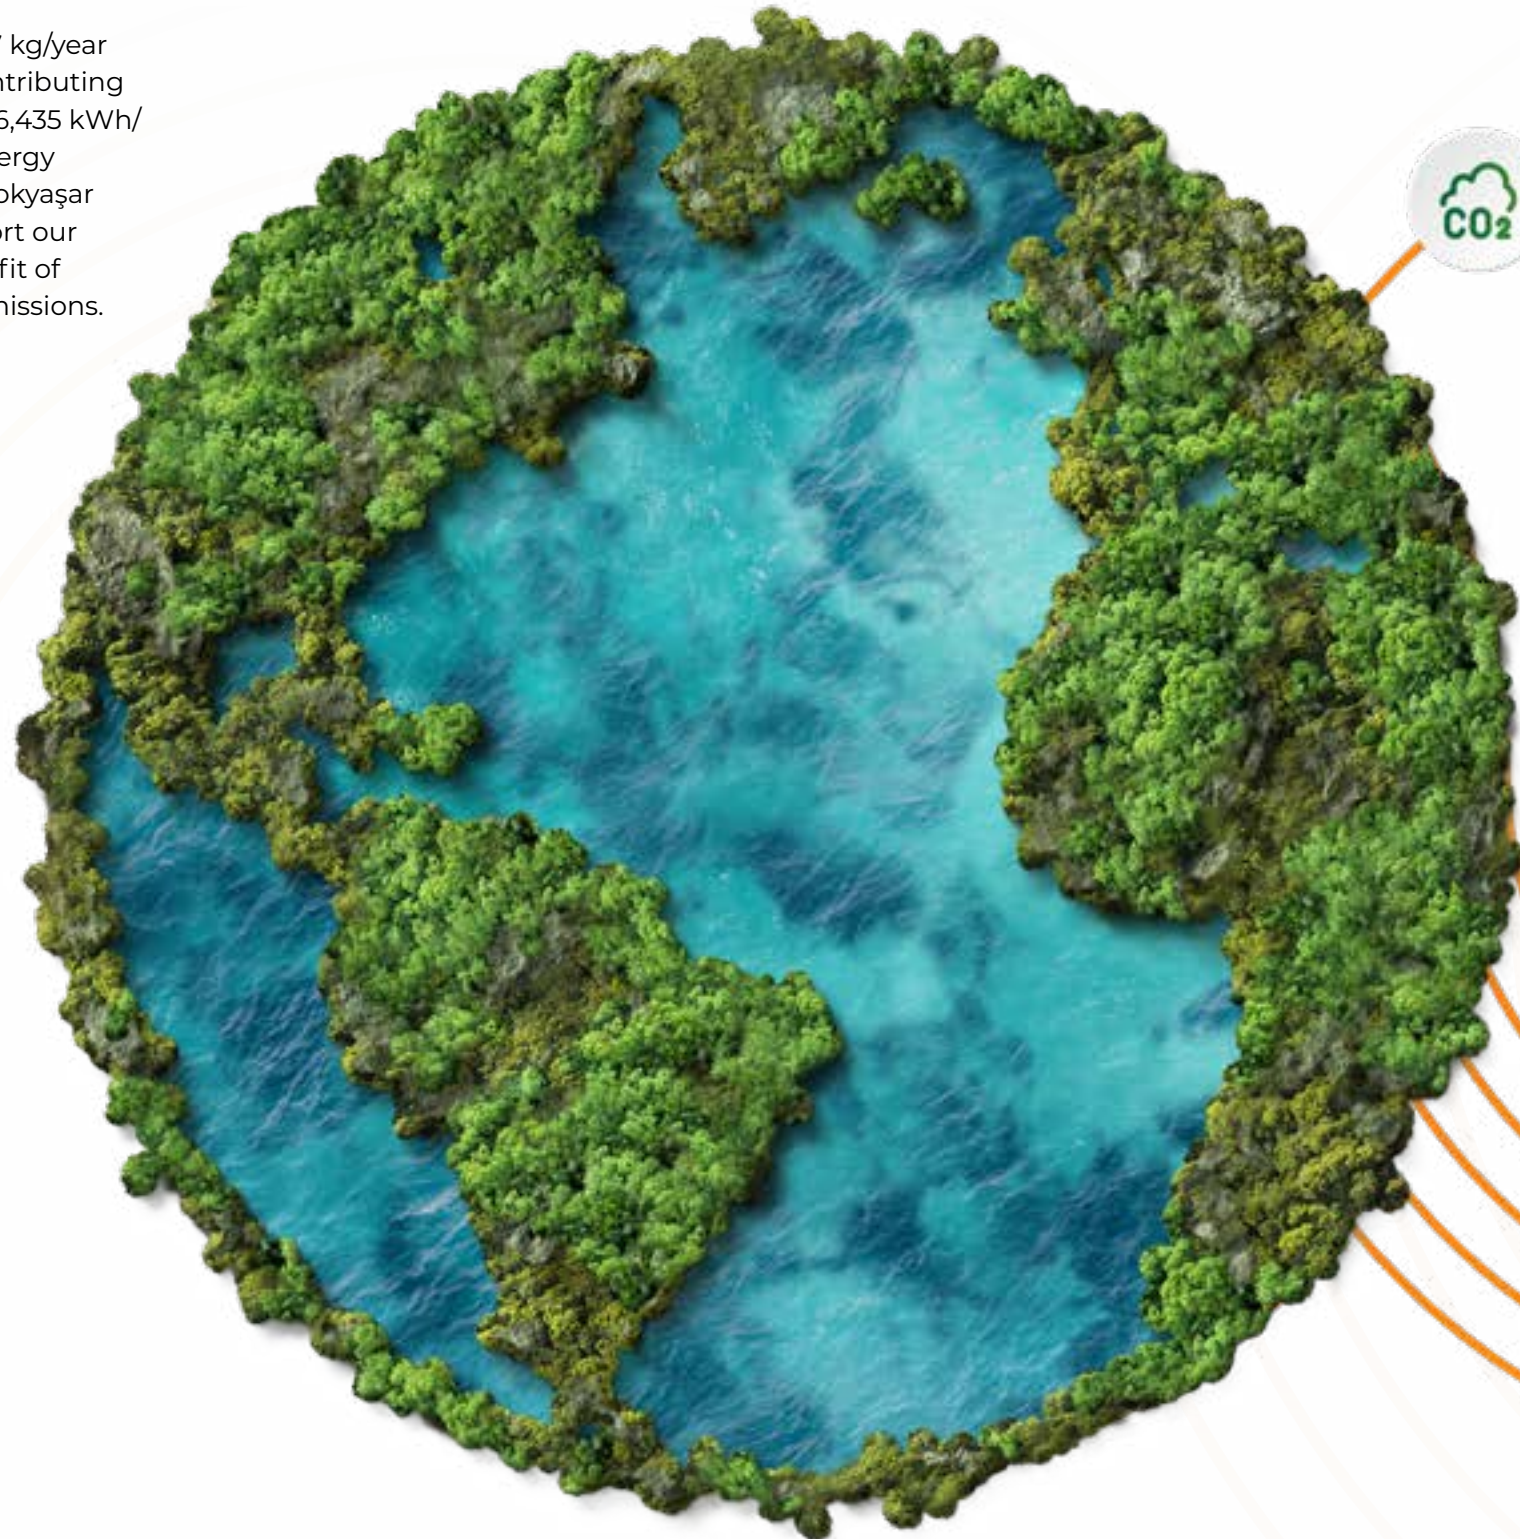

HOW WILL WE ADD VALUE TO YOUR BRAND?

- With high quality products, downtimes due to raw materials in your production lines will be prevented.
- We will offer a hassle-free trade with our 24/7 solution-oriented sales team. We will continue to provide technical support to you with our after-sales services.
- With our expert operation team; Our products are delivered to you.
- With our Quality Laboratories, our products are inspected and documented in detail before delivering to you.


infinite possibilities






CERTIFICATES



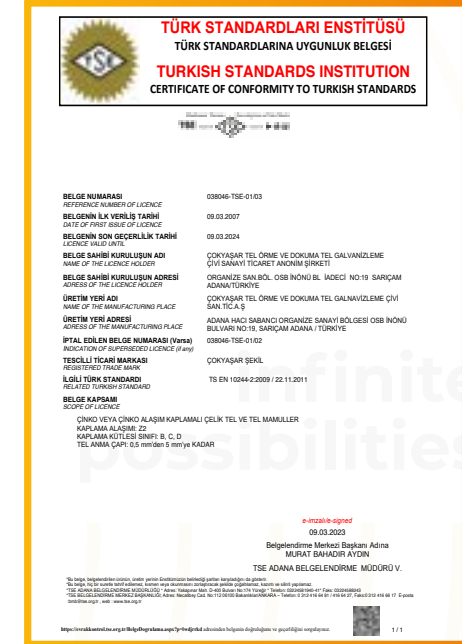

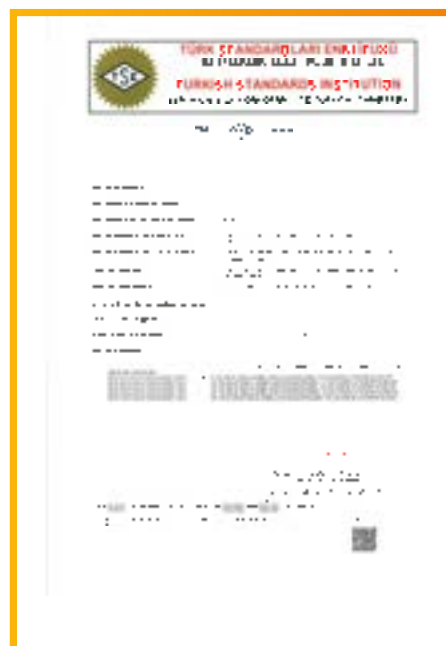

HEADQUARTERS

Seyitnizam Mah. Demirciler Sit.
10. Yol Aydaş İş Merkezi B Blok Kat:1
Zeytinburnu / İstanbul / TÜRKİYE
Tel : +90 212 634 04 44

SİLİVRİ

Fevzipaşa Mah. Gölet Yolu Cad. 34580
Değirmenköy / Silivri / İstanbul / TÜRKİYE
Tel : +90 212 547 16 45

ADANA

Acidere Mah. Hacı Sabancı Organize Sanayi
Bölgesi İnönü Bulvarı No: 22
Sarıçam / Adana / TÜRKİYE
Tel : +90 322 394 45 35

DÜZCE

D-100 Karayolu üzeri
Çaybükü Köyü Mevkii
Gümüşova / Düzce / TÜRKİYE
Tel : +90 380 731 35 50

COKYASAR

5th YEAR

