

COKYASAR

5th YEAR

**infinite
possibilities**



cokyasarholding.com.tr



SPRING WIRE - *BEDDING INDUSTRY*

A wide range of steel wire from 1.20 mm to 3.80 mm in diameter is produced for mattress, furniture, spring manufacturers at Çokyaşar Halat Facility. It provides fast solution partnership with its production capacity. Thanks to its customer focus, it prioritizes satisfaction. It makes ÇOKYAŞAR a preferred business partner with its production ranging and packing alternatives from 200 kg to 800 kg and in accordance with the desired quality specifications. The products are shipped with core cardboard, steel strapping and covered with a special material that will protect them from adverse external conditions.

** Steel wires manufactured according to EN 10270-1*



SPRING WIRE TECHNICAL SPECIFICATION


Diameter (mm)	Tolerance (mm)	Purpose of	Tensile Strength (N/mm ²)	Torsion	Carbon Percentage (min-max %)	Coil Weight (kg)	Coil Internal Diameter	
							Height (mm)	Inner Diameter (mm)
1,30	±0.02	Helical/bonnel	1570-1770	25	0,45	130-150	200	500
						300-400	460	440
						500-600	800	500
1,40	±0.02	Helical/bonnel	1570-1770	25	0,45	130-150	200	500
						300-400	460	440
						500-600	800	500
1,10	±0.02	Pocket	2050-2200	25	0,68-0,72	300-400	460	440
						500-600	750	440
1,20	±0.02	Pocket	2050-2200	25	0,68-0,72	300-400	460	440
						300-400	750	440
1,30	±0.02	Pocket	2000-2200	25	0,68-0,72	300-400	460	440
						300-400	750	440
1,40	±0.02	Pocket	1950-2150	25	0,68-0,72	300-400	460	440
						300-500	750	440
						400-500	800	500
1,50	±0.02	Pocket	1950-2150	25	0,68-0,72	300-400	460	440
						450-550	750	440
						400-500	800	500
1,60	±0.02	Pocket	1900-2100	22	0,68-0,72	300-400	460	440
						450-550	750	440
						400-500	800	500
1,70	±0.02	Pocket	1850-2050	22	0,68-0,72	300-400	460	440
						450-550	750	440
						400-500	800	500
1,80	±0.025	Pocket	1750-1950	22	0,68-0,72	300-400	460	440
						500-650	750	440
						400-500	800	500
1,90	±0.025	Pocket	1700-1950	22	0,68-0,72	300-400	460	440
						500-650	750	440
						400-500	800	500
2,00	±0.025	Pocket	1700-1900	22	0,68-0,72	300-400	460	440
						600-750	750	440
						400-500	800	500
2,10	±0.025	Pocket	1650-1850	22	0,68-0,72	300-400	460	440
						600-750	750	440
						400-500	800	500
2,20	±0.025	Pocket	1600-1800	22	0,68-0,72	300-400	460	440
						600-750	750	440
						400-500	800	500

SPRING WIRE TECHNICAL SPECIFICATION

Diameter (mm)	Tolerance (mm)	Purpose of	Tensile Strength (N/mm ²)	Torsion	Carbon Percentage (min-max %)	Coil Weight (kg)	Coil Internal Diameter	
							Height (mm)	Inner Diameter (mm)
1,50	±0.020	Bonnell	1950-2150	22	0,60-0,66	300-400	460	440
						500-650	750	440
						400-500	800	500
1,60	±0.020	Bonnell	1900-2100	22	0,60-0,66	300-400	460	440
						500-650	750	440
						400-500	800	500
1,70	±0.020	Bonnell	1850-2050	22	0,60-0,66	300-400	460	440
						500-650	750	440
						400-500	800	500
1,80	±0.025	Bonnell	1750-1950	22	0,60-0,66	300-400	460	440
						500-650	750	440
						400-500	800	500
1,90	±0.025	Bonnell	1700-1900	22	0,60-0,66	300-400	460	440
						500-650	750	440
						400-500	800	500
2,00	±0.025	Bonnell	1680-1850	22	0,60-0,66	300-400	460	440
						600-750	750	440
						400-500	800	500
2,10	±0.025	Bonnell	1650-1850	22	0,60-0,66	300-400	460	440
						600-750	750	440
						400-500	800	500
2,20	±0.025	Bonnell	1600-1800	22	0,60-0,66	300-400	460	440
						600-750	750	440
						400-500	800	500
2,30	±0.025	Bonnell	1550-1750	22	0,60-0,66	300-400	460	440
						600-750	750	440
						400-500	800	500
2,40	±0.025	Bonnell	1500-1700	22	0,60-0,66	300-400	460	440
						600-750	750	440
						400-500	800	500


Packing Types

Z2 250-450 kg (Without Cardboard)



Weight= 250-450 Kg
 Height= 280 mm
 Diameter= 700-850 mm
 Inner Diameter= 356 mm

Z3 500-1000 kg (Cardboard)



Weight= 500-1000 Kg
 Height= 560 mm
 Diameter= 700-850 mm
 Inner Diameter= 550 mm

43 / 75 Cardboard Core

Coil with cardboard core 44



Weight= 450-550 Kg
 Height= 550 mm
 Inner Diameter= 440 mm

Coil with cardboard core 44/75

Weight= 700-850 Kg
 Height = 750 mm
 Inner Diameter= 440 mm

Coil with cardboard core 75

Weight= 400-500 Kg
 Height = 800 mm
 Inner Diameter = 500 mm



Metal Basket




Weight= 500 - 600 Kg
 Height= 1250 m
 Inner Diameter= 370 mm

Coil

150-250 Kg

2,50-4,00 mm




Height= 150-200 mm
 Diameter= 700 mm
 Inner Diameter= 470 mm

200-500 Kg

4,0-14,0mm



Height= 250-300 mm
 Diameter= 1000 mm
 Inner Diameter= 800 mm

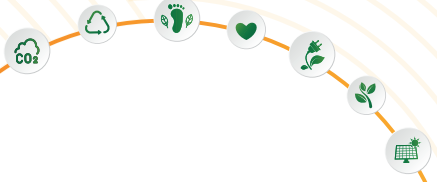

Sustainability

FOR A SUSTAINABLE FUTURE!

By contributing to the electricity production of 1,600,000 kWh/year with our solar energy panels in our Çokyaşar Halat factory, we prevent 743.953 kg/year CO₂ emissions in the atmosphere. In return, we support our environment in an amount equal to the benefit of 137,500 trees in reducing carbon emissions.



HEADQUARTERS:

Seyitnizam Mh. Demirciler Sitesi
10.Cadde Aydaş İş Merkezi B Blok No:7 Kat:1 34015
Zeytinburnu/İstanbul – Türkiye

P: +90 212 634 04 44

E: info@cokyasarholding.com.tr

FACTORY:

Çaybükü Köyü Ankara Sok. No:45
81852 Gümüşova/Düzce - Türkiye

P: +90 380 731 35 50

E: info@cokyasarhalat.com

COKYASAR

5 YEAR
50 *th*

